

32" Channel Drain Anti-Entrapment (Anti-Vortex) Suction Outlet Cover and Frame

VGB Series

Product Specification Sheet

The AquaStar line of suction outlet covers, compliant with the new Virginia Graeme-Baker Pool and Spa Safety Act (ASME/ANSI A112.19.8a-2008)

Features

A single, unblockable suction outlet that exceeds the new VGB mandate and ASME/ANSI A112.19.8a-2008 standard

Requires a minimum 3" sump depth

For single or multiple drain use (see installation instructions for plumbing, hydrostatic valve/drain pipe and single or multi-pump connections)

Single

Floor: 236 GPM at 3.4 fps

Wall: 136 GPM at 1.9 fps

Floor/wall: 106 GPM at 1.5 fps

22.6 square inch opening

#316 stainless steel screws

Manufactured from superior UV-resistant engineered polymers

Meets or exceeds NSF 50/ASME/ANSI A112.19.8a-2008 national standards and ASTM G154 UV testing

Includes disposable "dogbone" supports to retain shape during all phases of construction

Listed with IAPMO R&T

12 per case

The Unblockable!™



For field-fabricated sump (concrete pools)
Part # 32CDAVFRxxx




Two Drains in One!

Part Numbers / Colors

- 32CDAVFR101 White
- 32CDAVFR102 Black
- 32CDAVFR103 Lt. Gray
- 32CDAVFR104 Blue
- 32CDAVFR105 Dk. Gray
- 32CDAVFR106 Bone
- 32CDAVFR107 Taupe
- 32CDAVFR108 Tan

Also available without sump/frame
p/n 32CDAVNFxxx 12 per case

VGB 2008 Compliant

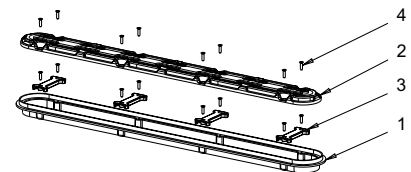

1. 32" channel drain, no sump, frame
2. 32" anti-entrapment suction outlet cover
3. 32" channel drain, frame support "dog bones", qty 4
4. #10 x 3/4" flat head phillips type-a screw, 316 ss, qty 16