

32" Channel Drain Flat Grate Anti-Entrapment Suction Outlet Cover and Three-Port Manufactured Sump

VGB Series

Product Specification Sheet

The AquaStar line of suction outlet covers, compliant with the new Virginia Graeme-Baker Pool and Spa Safety Act (ASME/ANSI A112.19.8a-2008)

Features

A single, unblockable suction outlet that exceeds the new VGB mandate and ASME/ANSI A112.19.8a-2008 standard

For single or multiple drain use (see installation instructions for plumbing, hydrostatic valve/drain pipe and single or multi-pump connections)

Single

Floor: 316 GPM at 3.9 fps

Wall: 208 GPM at 2.6 fps

Floor/wall: 122 GPM at 1.5 fps

25.9 square inch opening

#316 stainless steel screws

Manufactured from superior UV-resistant engineered polymers

Three ports: bottom 2½" OD, 2" ID S/S; inside 2" threaded FPT; two 2" threaded plugs included

Meets or exceeds NSF 50/ASME/ANSI A112.19.8a-2008 national standards and ASTM G154 UV testing


Orange disposable plastic pre-gunite/plaster insert keeps debris out and retains sump shape during construction

Must use transitional glue when attaching to PVC pipe

Listed with IAPMO R&T

4 per case

The Unblockable!™

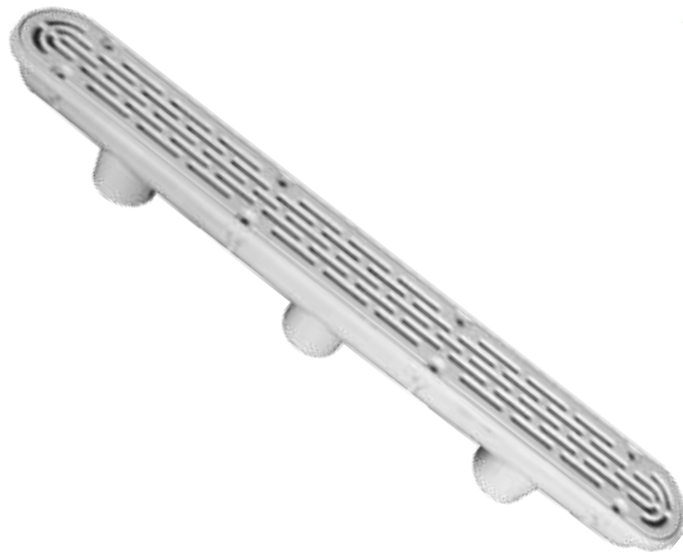

With sump (concrete pools)
Part # 32CDFLxxx



Two Drains in One!

Part Numbers / Colors


- 32CDFL101 White*
- 32CDFL102 Black*
- 32CDFL103 Lt. Gray*
- 32CDFL104 Blue*
- 32CDFL105 Dk. Gray*
- 32CDFL106 Bone*
- 32CDFL107 Taupe*
- 32CDFL108 Tan*

Also available as sump only
p/n 32CDSBxxx 4 per case

VGB 2008 Compliant



2-1/2" spigot x 2" socket x 2" NPT



1. 32" three-port manufactured sump bucket
2. 32" channel drain, cover, flat
3. 2" NPT plug, qty 2
4. 32" channel drain, plaster shield
5. #10 x 3/4" flat head phillips type-a screw, 316 ss, qty 16